






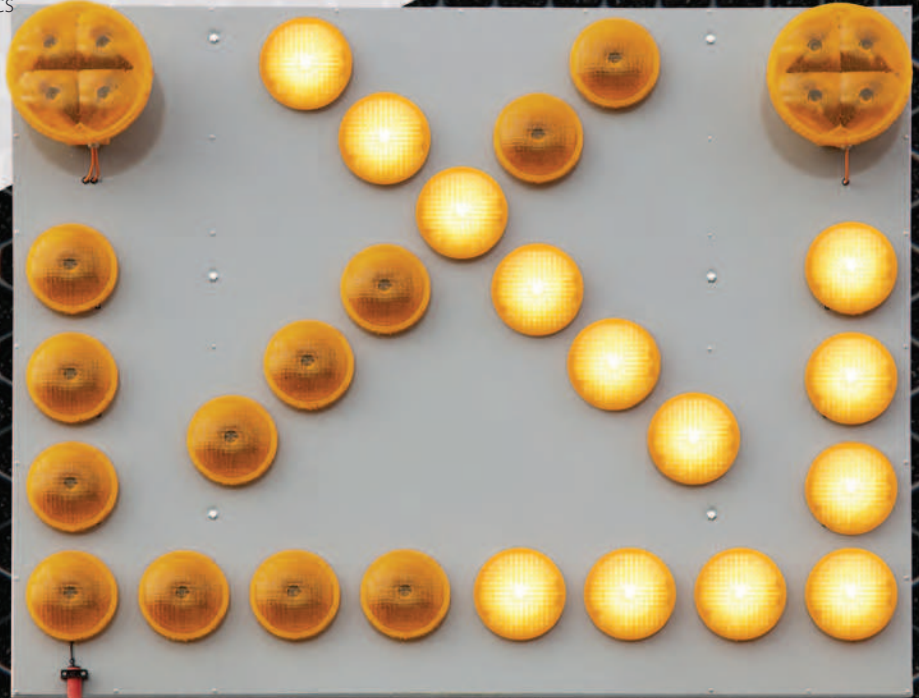


LED Light Arrow LP 8000

- Specifically designed for IPVs & TM vehicles
- Top and bottom boards are inter-linked with an arrow motor
- Galvanised framework with grey aluminium backing board
- High grade micro-processor controlled electronics
- Easy to operate with cab-fitted remote control
- Consists of high intensity 2-fold 340 mm dia LED lamps
- TSRGD and Chapter 8 compliant (UK)
- A Vertical Lift version is also available



| | | | | | | | |
|---|---------------------------------|---|------------------------------|---|---|---|--|
|  | Light source LED |  | Light colour amber |  | Dimensions (WxH) 2220 x 1720 mm |  | Eff. light intensity day / night 0.7 A / 0.5 A |
|  | Operating voltage 24V |  | Weight 100 kg |  | Flash rate 40 fl./min | | |

LED Light Arrow LP 8000

Ref. No.

LP8025 NiBus Light Arrow, NiBus, complete with 25 Zyklop L8H Lamps, 2-fold LED 340mm Lamps c/w 20m cable remote

NUK-000002B

Accessories and Spare parts

Ref. No.

Standard cable remote control


129266-26-02



LP8000



LP8000 - stowed position

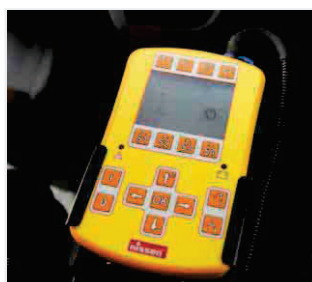

Standard cable remote



More information
NIS-01992
To be entered on nissen-germany.com