

# Safety Barriers

Excellent protection of site staff



## Robust plastic barrier system for slip road closures and roadworks


- High quality plastic barrier for instant protection with galvanized metal tubes which slot into the Nissen universal base plates "K1" (feet)
- Capable of withstanding high wind pressures, e.g. caused by passing trucks
- All parts firmly interconnected and suitable for any kind of surface
- Creation of any angle by using Nissen universal base plates
- Equipped with retroreflective foil type 1 for high visibility
- Protective rim around the sign face for protecting the foil against damage during transport and storage
- Special field for placing company logo
- Quick mounting of safety lamps (e.g. Nissen MonoLight) by using metal brackets
- Maintenance free and weather-resistant
- Easy to stack, transport and store

# Safety Barriers


Excellent protection of site staff



Plastic Safety Barrier	Ref.No.
Measurement: 2000 x 1000 mm (78,74 x 39,37 inch)	71655-103
Measurement: 2400 x 1000 mm (94,49 x 39,37 inch)	71655-104

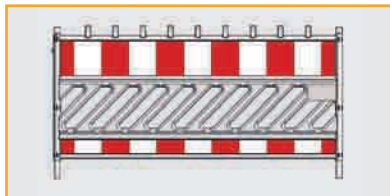

Plastic Safety Barrier 2000 x 1000 mm

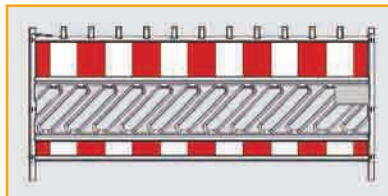


Plastic Safety Barrier 2400 x 1000 mm



Accessories	Ref.No.
Universal base plate "K1", weight approx. 28 kg (61,7 lbs)	70350-31
Transport and storage box type Standard for 20 safety barriers 2400 mm (94,49 inch)	71660-4
Transport and storage box type Combi for 20 safety barriers 2000 and 2400 mm (78,74x94,49 inch) (can be piled up)	71660-20



Universal base plate „K1“

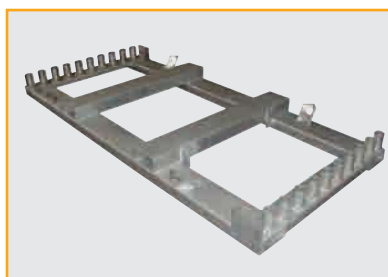

Transport and storage box type Standard



Field for your company logo



## MonoLight Ref.-No. 111 602-60

- Single battery LED Lamp
- 180 mm dia polycarbonate lens
- Robust locking system of battery compartment
- Supplied with attached cone bracket
- Flashing / continuous mode
- BS 3143 pt 2 and EN 12352 compliant
- Available in red or amber LED



## Speed Ramps

- Made from recycled material
- Highly stable and long-lasting
- Easy to mount by using metal bolts
- Available in amber and black colours
- Available for speeds up to 10 km/h (ca. 6 mph) and 20 km/h (ca. 12 mph)

Subject to technical modifications. For supply of these and many other Nissen products please contact Nissen UK Limited.

Nissen UK Limited

51 Queen of Denmark Court | London | SE16 7 TB | United Kingdom | Tel: +44 (0) 207 2 37 75 74 | Fax: +44 (0) 207 3 94 63 17 | E-Mail: info@nissen-uk.com | www.nissen-uk.com